

REMIX550

Troncatrice doppia
testa ascendente
per tagli piramidali




PRODUCE SOLUZIONI



Mepal Italia




Left and right heads at 22,5° inwards

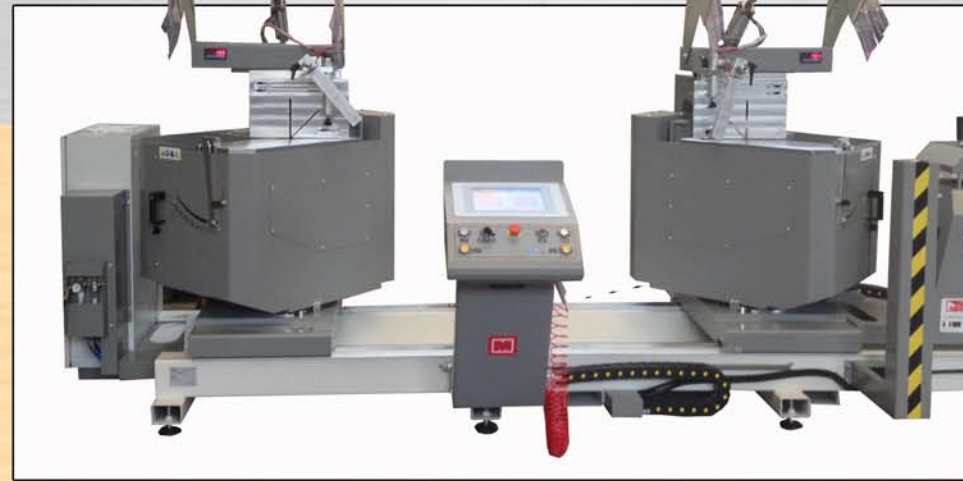

Left and right heads at 30° outwards



DIAGRAMMA DI TAGLIO TRONCATRICE ASCENDENTE REMIX CON LAMA Ø550mm (tolleranza±3mm)

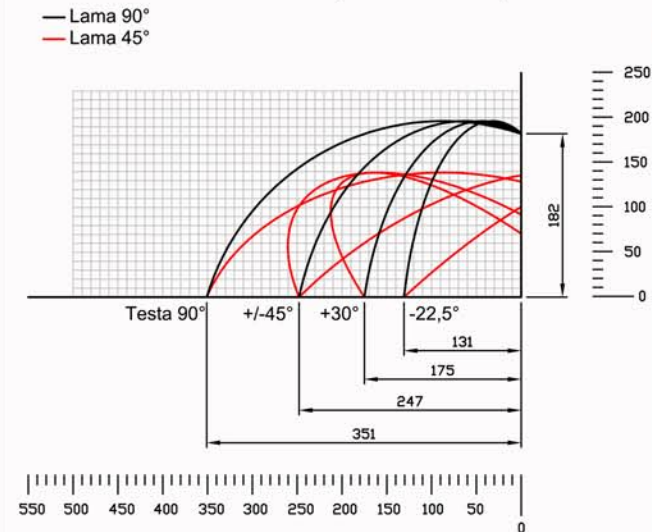

TECHNICAL DATA:

Ø550 mm Widia upcat saw
 Blade motors 400 V (3 kw) - 50/60 Hz.
 Blade rotation speed 2800 rpm.
 Heads rotation from 90° to 22,5° inwards and from 90° to 30° outwards.
 Intermediate angles displayed on a screen.
 Blades tilting from 90° to 45° inwards and intermediate tilting.
 Carriage (X axis) movement with a brushless motor. Max speed 20 m/min.
 Blade movements with hydropneumatic cylinder (adjustable rising speed/quick return)
 2,5 m rolling table with vertical rollers
 Operating pressure: 7 bar

EQUIPPED WITH TOUCHSCREEN 12" CNC
 ABLE TO:

- Manage single cuts
- Save till 99 profile codes with their data
- Save and use cutting lists through USB drive
- Manage windows and doors macro
- Use over-length software
- Use under-length software


OPTIONAL ACCESSORIES:

- Micro-drop lubrication with pure oil
- UPS (220V – 50Hz – 250VA)
- 20 l cutting oil
- Intermediate profile support

STANDARD ACCESSORIES:

- No.2 Widia Ø550 mm blades
- Spray mist lubrication

REMIX550

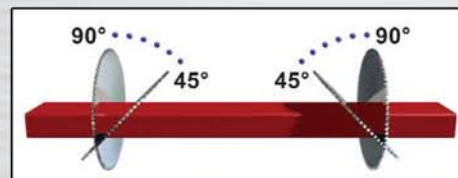

Ingombro - Overall dimensions - Abmessungen - Dimensiones - Dimensões - Encombrament Peso - Weight - Gewicht - Poids

	L	W	H	
4000	5910	1930	1700	Kg 2150
5000	6910	1930	1700	Kg 2335

